


# ENGINE THERMOCOUPLE

## Model 767 Heavy-Duty

- Ideal for Environments with Extreme Vibration and Corrosion
- 1/2 in. O.D. 316 Stainless Steel Protection Tube
- Terminal Block is Easily Accessible for Extension Wire Connection
- Ungrounded Element

Typical Part Numbers:  
 Single Element  
**662-001-000-XXX**

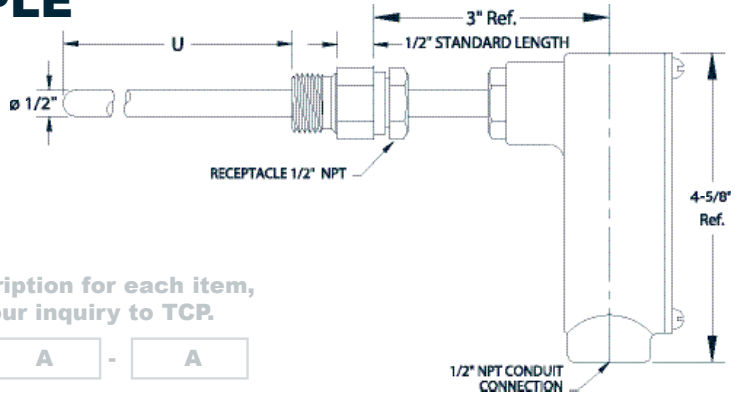

Enter a description for each item, please fax your inquiry to TCP.

Example: 767 -  -  -

767 -  -  -

**CALIBRATION:**  
**J = Iron/Constantan**  
**K = Chromel/Alumel**

**INSERTION LENGTH (U)**  
**A = 4-1/8"**  
**B = 5-1/8"**


**RECEPTACLE HEX LENGTH**  
 Standard Length is 1/2"

**A = 1/2"**  
**B = 3/4"**  
**C = 1-3/16"**  
**D = 1-1/2"**  
**E = 1-3/4"**  
**F = 3-1/4"**

## Model 3810 Bearing Thermocouple

- Ideal for Engine and Compressor Service
- Spring-loaded for Superior Bearing Contact
- Strain-Relieved Wire to Eliminate Thermocouple Breakage from Vibration
- High-Temperature Teflon with Braided Stainless Steel Overwrap
- 1/4 in. O.D. 304 Stainless Steel Protection Tube
- Identification: Model #, Sales Order #, or Customer #

Typical Part Numbers:  
 J Element  
**662-041-000-XXX**  
 K Element  
**662-041-050-XXX**

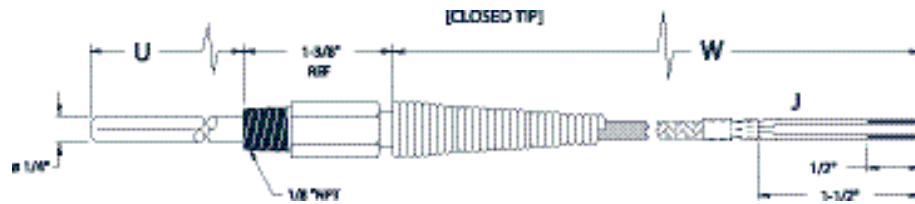

Enter a description for each item, please fax your inquiry to TCP.

Example: 3810 -  -  -

3810 -  -  -

**CALIBRATION:**  
**J = Iron/Constantan**  
**K = Chromel/Alumel**

**INSERTION LENGTH (U)**  
 Minimum = 1-3/8"  
 Maximum = 15" Insertion Length

**A = 1-3/8"** Grounded  
**B = 2-3/4"** Grounded  
**C = 3-7/8"** Grounded  
**D = 6-1/4"** Grounded  
**E = 7"** Grounded  
**F = 3-15/16"** Ungrounded  
**G = 3-3/4"** Grounded  
**H = 3-3/4"** Ungrounded

**WIRE LENGTH**  
 Minimum Wire Length 060 = 60" (5ft.)  
**Enter 3 digits**  
 Example: 072 = 72" Wire Length

**Metric Orders Welcome**

Place an **mm** in the appropriate selection box:

**Also available in RTD**  
 Please contact the factory for more information.