


## P140 Relief Curve

To Whom It May Concern,

BelGAS has conducted testing to observe the relief performance of the following P140 configuration in accordance to ANSI B109.4 (Lever Disconnect Test).

P140 Specifications	
Port:	3/4" X 1" NPT Straight
Orifice:	3/16"
Setpoint:	2 PSIG

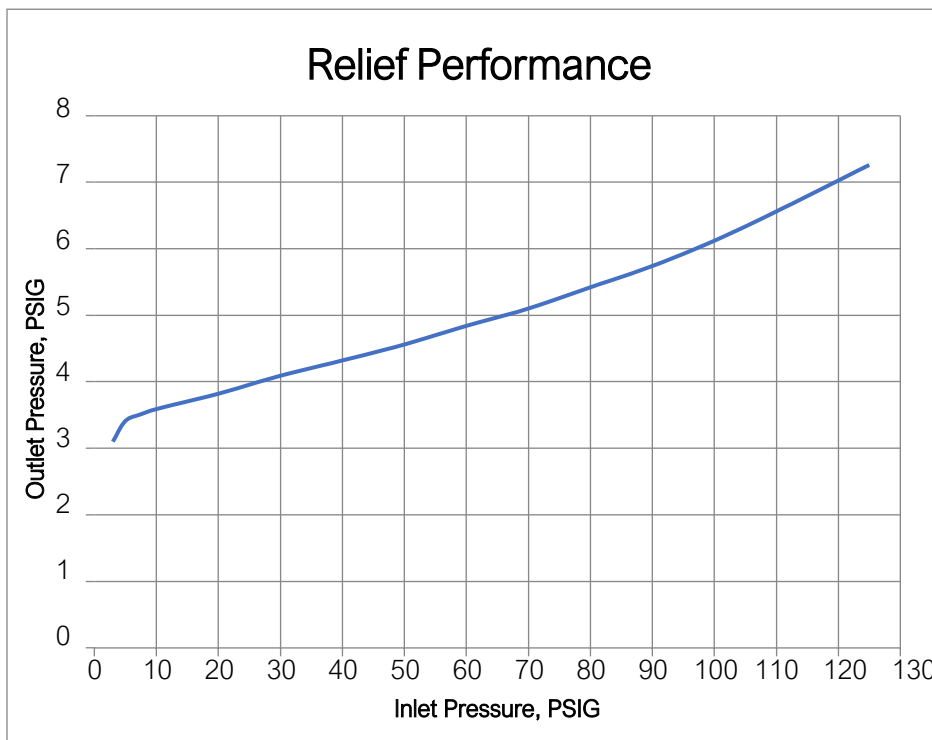

Please contact BelGAS if there are any further questions in regards to the relief testing.

Jon Kaufman  
Product Manager – BelGAS





## Description

When changing a lower pressure P140 to a higher pressure unit, the bonnet and adjustment screw must be changed as well.

5"-7" up to 1-2 psi spring ranges use;

Bonnet **604-291-000**      Adjustment Screw **648-581-000**

2-4 psi up to 4-5 psi spring ranges use;

Bonnet **604-292-000**      Adjustment Screw **648-581-001**



*Note: More than just a spring change is needed.*