


P308/P309 Slam Shut Regulators



The BelGAS P308/P309 Over/Under slam shut regulators feature the integrated PSX2 slam shut device which aids in critical protection of downstream operations. Operating on preset values, the P308/P309 regulators automatically stop downstream flow should pressure exceed the upper or lower set limits. Should the P308/P309 be tripped, due to an over/under pressure condition, a manual reset is required.

Over/Under closure devices protect downstream operations and equipment should the outlet pressure of the main regulator exceed the set point. It also assures that when gas pressure drops below the set point for maintaining pilot light or critical flow, gas flow is shut down until a manual reset or inspection takes place.

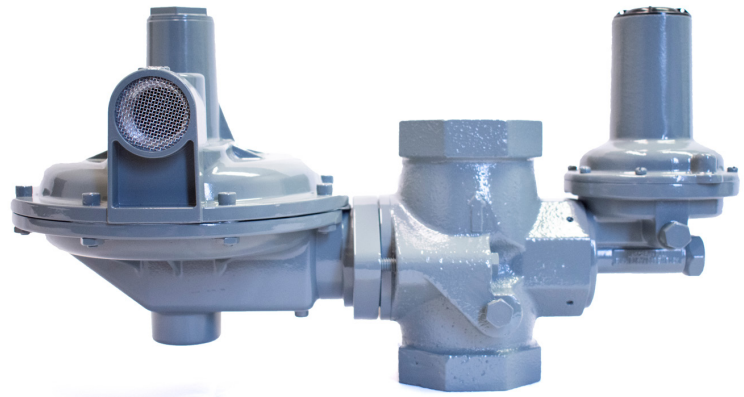

Applications

- Industrial/Commercial
- Gas Engines
- Service Regulators

Features

- Internal or External registration
- Over/Under Pressure protection
- Manual Reset

For all applicable flow rates for the P308/P309 series regulators with the PSX2 device, refer to the flow charts in the P300 standard regulator literature.

Specifications

Maximum Inlet	See Table 1
Maximum Emergency Outlet	15 PSIG
Pressures Ranges	See Table 2
Port Sizes	1.25 NPT
	1.5 NPT
	1.5 X 2 NPT
	2 NPT
Orifice Sizes	3/16"
	1/4"
	3/8"
	1/2"
	3/4"
End Connections	150 RF Flange
	125 FF Flange
	NPT
Temperature Range	-20 °F to 180 °F
	-29 °C to 82 °C
Approx. Weight	17lbs

PSX2 Ranges

Under Pressure Range	Over Pressure Range
2 - 12" WC / 4.9 - 29.9 mBAR	12 - 25" WC / 29.9 - 62.3 mBAR
4 - 30" WC / 9.9 - 74.7 mBAR	20 - 52" WC / 49.8 - 129.5 mBAR
10" WC - 2.3 PSIG / 24.9 - 159.4 mBAR	1.4 - 3.9 PSIG / 96.5 - 268.9 mBAR
1.5 - 10.8 PSIG / 103.4 - 744.6 mBAR	3.8 - 8.7 PSIG / 262.0 - 600.0 mBAR
	5.8 - 16 PSIG / 399.9 - 1,103.0 mBAR

Table 1: Maximum Operational Inlet Pressure

Orifice Size	Range	Maximum Inlet Pressure
Inches		
3/16"	Any	125 PSIG
1/4"	Any	125 PSIG
3/8"	Any	125 PSIG
1/2"	Any	100 PSIG
3/4"	Any	60 PSIG

Materials of Construction

Body	Ductile Cast Iron
Bonnet	Aluminum
Housing	Aluminum
Diaphragm	Nitrile
Molded Seat Assembly	Nitrile and Aluminum
Orifice	Aluminum
Adjusting Nuts	Aluminum, Brass (PSX2)

Slam Shut Valve

How It Works

The slam shut valve type PSX2 provides downstream protection by immediately shutting off the gas flow in case of an over or under pressure situation. The PSX2 is available with either internal or external registration. For external registration, a downstream sensing line will be required.


The slam shut valve disk is held in the open position by a ball pressing against the closing shaft. If the pressure underneath the diaphragm reaches the over/under pressure setpoints, the diaphragm will move up or down and cause the ball to be released. The spring force on the stem causes the valve to shut and stop the flow of gas. Once tripped the PSX2 requires a manual reset to reintroduce the flow downstream.

Over Pressure

The larger spring controls the over-pressure setpoint of the slamshut device. The spring adjustment tool is used to set the spring to the desired tripping pressure. No matter how strong the over pressure spring is it will not conflict with under pressure tripping due to the spring only being able to travel in the upward direction. When the pressure under the diaphragm overcomes the spring force, the diaphragm will lift upwards causing the lever mechanism to release the ball, closing the valve.


Under Pressure

The smaller spring controls the under-pressure setpoint of the slam shut device. The spring adjustment tool is used to set the spring to the desired tripping pressure. The under pressure spring always needs to be set at a lower tripping pressure than the over pressure spring, or the slam shut will not function properly. Normally, the under pressure spring pushes down on the diaphragm. When the pressure under the diaphragm can no longer balance out the spring force the diaphragm will move downward causing the tripping mechanism to release the ball, closing the valve.

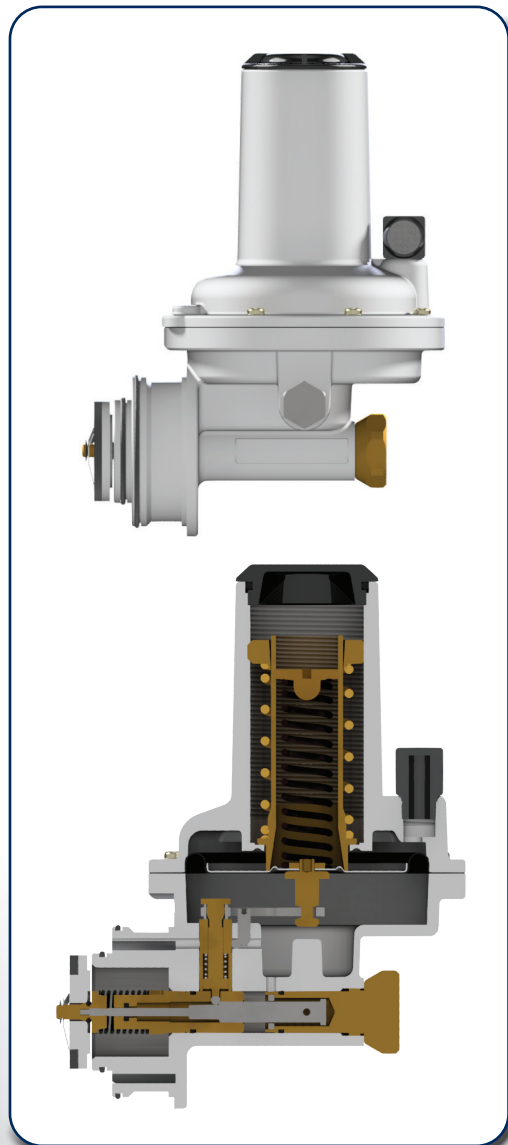


PSX2 Dimensions

Fig. 1

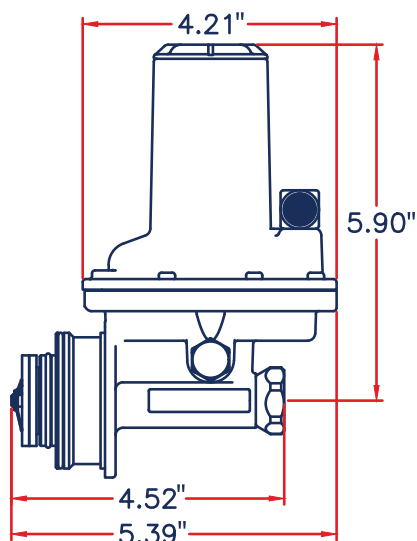


P308/P309 Dimensions


Fig. 2

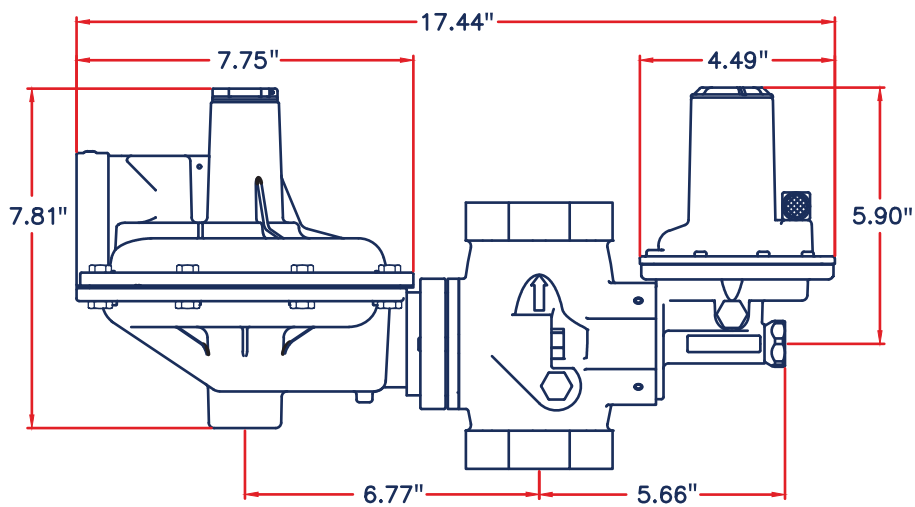

P308/P309 Body Position

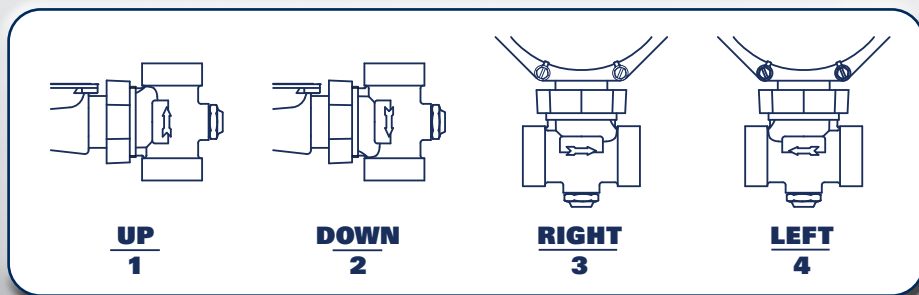

P308/P309 Bonnet Position

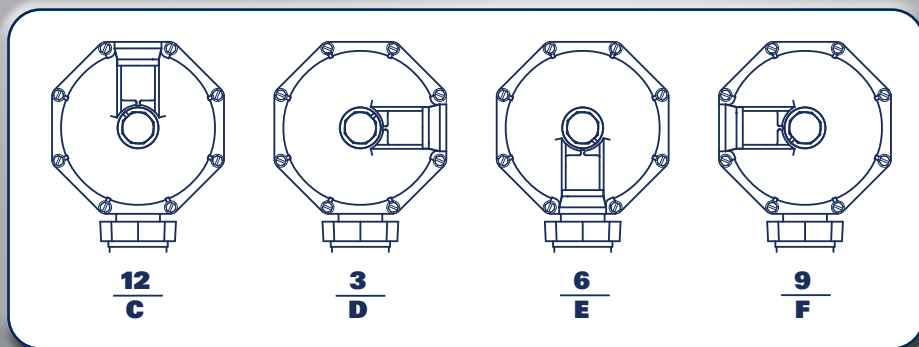

P308/P309 Part Matrix

P30											
↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	Version
8											Non-Relieving
9											Relieving
											Regulator Registration
	0										Internal
	P										External
											Port Size
		12									1.25" NPT
		14									1.5" NPT
		15									1.5" x 2" NPT
		16									2" NPT
		17									2" 150RF (Steel Only)
		18									2" 125FF (Iron Only)
											Spring Range - WC or PSI / mBAR
		06									Normal 3" - 6" WC / 7.5 - 14.9
		85									5" - 8.5" WC / 12.4 - 21.2
		14									6" - 14" WC / 14.9 - 34.8
		28									12" - 28" WC / 29.9 - 69.7
		02									High 1 - 2 PSI / 68.9 - 137.9
		03									1.5 - 3 PSI / 103.4 - 206.8
		05									2.5 - 5 PSI / 137.9 - 379.2
		08									4.5 - 8 PSI / 310.3 - 551.6
											Orifice
			3								3/16"
			4								1/4"
			6								3/8"
			8								1/2"
			B								3/4"
											Port Orientation
			1								Up (Standard)
			2								Down
			3								Right
			4								Left
											Bonnet Orientation
			C								12 O'clock
			D								3 O'clock (Standard)
			E								6 O'clock
			F								9 O'clock
											Body Material
			0								Iron
			2								Steel
											Slam Shut Registration
			0								Internal
			1								External
											Under Range - WC or PSI / mBAR
			0								None
			1								2 - 12" WC / 4.9 - 29.9
			2								4 - 30" WC / 9.9 - 74.7
			3								10" WC - 2.3 PSI / 24.9 - 159.4
			4								1.5 - 10.8 PSI / 103.4 - 744.6
											Over Range - WC or PSI / mBAR
			5								12 - 25" WC / 29.9 - 62.3
			6								20 - 52" WC / 49.8 - 129.5
			7								1.4 - 3.9 PSI / 96.5 - 268.9
			8								3.8 - 8.7 PSI / 262.0 - 599.8
			9								5.8 - 16 PSI / 399.9 - 1,103.0

PSX2 Replacement Assembly Matrix


971 PSX	10	
	↑	Under Range - WC or PSIG / mBAR
1		2 - 12" WC / 4.9 - 29.9
2		4 - 30" WC / 9.9 - 74.7
3		10" WC - 2.3 PSIG / 24.9 - 159.4
4		1.5 - 10.8 PSIG / 103.4 - 744.6
		Over Range - WC or PSIG / mBAR
5		12 - 25" WC / 29.9 - 62.3
6		20 - 52" WC / 49.8 - 129.5
7		1.4 - 3.9 PSIG / 96.5 - 268.9
8		3.8 - 8.7 PSIG / 262.0-599.8
9		5.8 - 16 PSIG / 399.9 - 1,103.0

PSX2 Springs

Under Pressure Spring Code	Over Pressure Spring Code	Main Spring Ranges
0	5	2 - 4.5" WC
0	5 or 6	3.5 - 6.5" WC
1	5 or 6	5 - 9" WC
1 or 2	6 or 7	8.5 - 18" WC
2	6 or 7	14 - 30" WC
2 or 3	7 or 8	1 - 2 PSIG
2 or 3	7 or 8	1.5 - 3.25 PSIG
3 or 4	8	2 - 5 PSIG
3 or 4	8	2 - 5.5 PSIG
4	9	4 - 10 PSIG

PSX2 Parts - Bodies - P308/P309

Item		Qty.	Part Number
1	1 - 1/4" NPT - Iron		664-671-000
	1-1/2" NPT - Iron		664-628-000
	2" NPT - Iron		664-628-001
	2" X 1-1/2" - Iron		664-628-002
	1-1/2" NPT - Steel	1	664-656-000
	2" NPT - Steel		664-656-001
	2" X 1-1/2" - Steel		664-656-002
	125 FF Iron		664-657-000
	150 RF - Iron		664-671-000
2	Housing O-Ring	1	649-269-000
3	Housing O-Ring	1	649-000-201
4	Disk Assembly	1	810-061-000
5	Retaining Spring	1	655-824-000
6	O-Ring	1	649-000-206
7	Retaining Ring	1	693-041-000
8	Slam Shut Seat	1	650-224-000
9	Seat O-Ring	1	649-396-002
10	Main Seat Orifice		
	1/4" Aluminum		688-016-000
	3/8" Aluminum		688-016-001
	1/2" Aluminum	1	688-016-002
	3/4" Aluminum		688-016-003
	1" Aluminum		688-016-004
	1-3/16" Aluminum		688-016-005
11	Port Gasket	1	624-133-000
12	Port Screw	1	648-622-000
13	PSX2	1	See Table

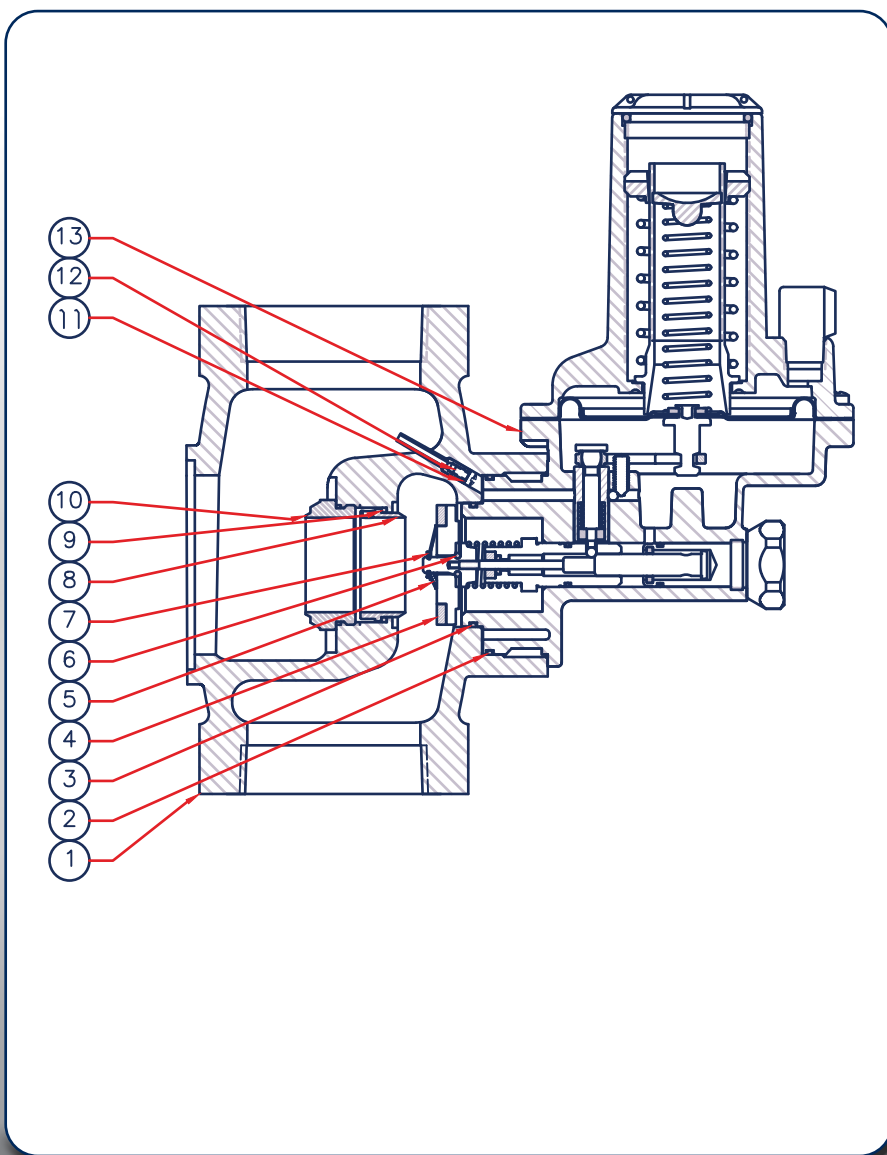

BelGAS

A Division of the Marsh Bellofram Group of Companies

8019 Ohio River Blvd.
Newell, WV 26050
(304) 387-1200 | www.belgas.net



BelGAS Website

With decades of proven market experience, the BelGAS division of Marsh Bellofram is a global leader in the design and manufacturing of high pressure regulators, low pressure regulators, and other flow control products. Scan the QR or visit our website at <https://bit.ly/BelGAS>



BelGAS Regulator Sizing Wizard

Need help finding the right regulator for your application? Check out the BelGAS Regulator Sizing Wizard - an interactive online tool that makes it easier than ever to precisely match a regulator with your specifications. Scan the QR code or visit our website at <https://bit.ly/BelGAS-Wizard>



BelGAS Videos

Interested in learning more about what BelGAS has to offer? Visit our YouTube channel and check out the BelGAS playlist for How-Tos, product overviews, and more! Scan the QR code or watch the videos on our YouTube channel at <https://bit.ly/BelGAS-YouTube-List>



The contents of this publication are presented for informational purposes only. Although we have made reasonable efforts to give information that we believe is up-to-date and accurate, we make no representations or warranties regarding its adequacy, accuracy, completeness, or correctness. We do not warrant or represent that the information is complete in every respect. Our terms and conditions, which are available upon request, govern all sales. We reserve the right to modify or improve the designs and specifications of our products, and the information contained in this document is subject to change without notice.

We reserve the right to modify or improve the designs or specifications of our products and the information contained in this document is subject to change without notice. The user is solely responsible for making the final selection of the product and assuring that all installation, performance, endurance, maintenance, safety, and warning requirements of the product are met. Final product recommendations should be verified by a gas professional.

BelGAS does not assume responsibility for its products' selection, use, or maintenance. Neither BelGAS nor its suppliers shall be liable for any loss or damage to the user or third parties caused by the product, the confidential information of BelGAS, or BelGAS's performance of these terms.