

# P350 Filter

## Excellent Filtration

The element is made from high efficiency glass microfiber with high grade 316SS end caps.

Stainless Steel Filter complies with NACE MR0175 for sulfide stress cracking resistant metallic material for oil field equipment.

## Maintenance

A tight seal is guaranteed by the use of a thread element connection. The filter housing and element have been polished and degreased. No special lubricants are needed in the field for replacing the element.

The element is threaded into the housing so there is no need for extra parts during installation or maintenance of the filter. There is no chance of losing top or bottom seals or rings required for installation.

## Applications

- Filtering Supply Gas
- Filtering Air Supply

## P350 Part Matrix

| P3500200000 |    |   |                    |
|-------------|----|---|--------------------|
|             | ↑  | ↑ | ↑                  |
|             | P  |   | Drain Option       |
|             | V  |   | Drain Plug         |
|             |    |   | Manual Drain Valve |
|             |    |   | Filter Option      |
|             | 25 |   |                    |
|             | 01 |   | 1 Micron           |
|             | 05 |   | 5 Micron           |
|             | 50 |   | 50 Micron          |
|             |    |   | Material           |
|             | 0  |   | Stainless Steel    |
|             | 1  |   | Aluminum           |

## P350 Replacement Filter Elements

|                  |             |
|------------------|-------------|
| <b>25 Micron</b> | 971-350-000 |
| <b>1 Micron</b>  | 971-350-001 |
| <b>5 Micron</b>  | 971-350-002 |
| <b>50 Micron</b> | 971-350-003 |

## Flow Rates


| Body Size | Pressure Differential | SCFM    |
|-----------|-----------------------|---------|
| 1/4 NPT   | 5 PSIG                | 19 SCFM |
|           | 10 PSIG               | 27 SCFM |
|           | 20 PSIG               | 40 SCFM |

## Specifications

| Body Size                    | 1/4 NPT   |           |
|------------------------------|---|-----------|
| Max Operating Pressure       | Aluminum  | 2150 PSIG |
|                              | Stainless Steel                                 | 5000 PSIG |
| Max Operating Temperature    | 248° F  | 120° C    |
| Drain Valve Assemble Options | Plugged Drain Port                              |           |
|                              | Manual Drain Valve                              |           |
| Weight Approximate           |   |           |
| Aluminum                     | 0.5 lb  | 0.22 kg   |
| Stainless Steel              | 1.1 lb  | 0.5 kg    |
| Materials of Construction    |   |           |
| Body,                        | Stainless Steel (NACE) Construction or Aluminum |           |
| Filter                       | 25 Micron Glass Microfiber (Standard)           |           |
|                              | Stainless Filter End Caps                       |           |



## P350 Dimensions

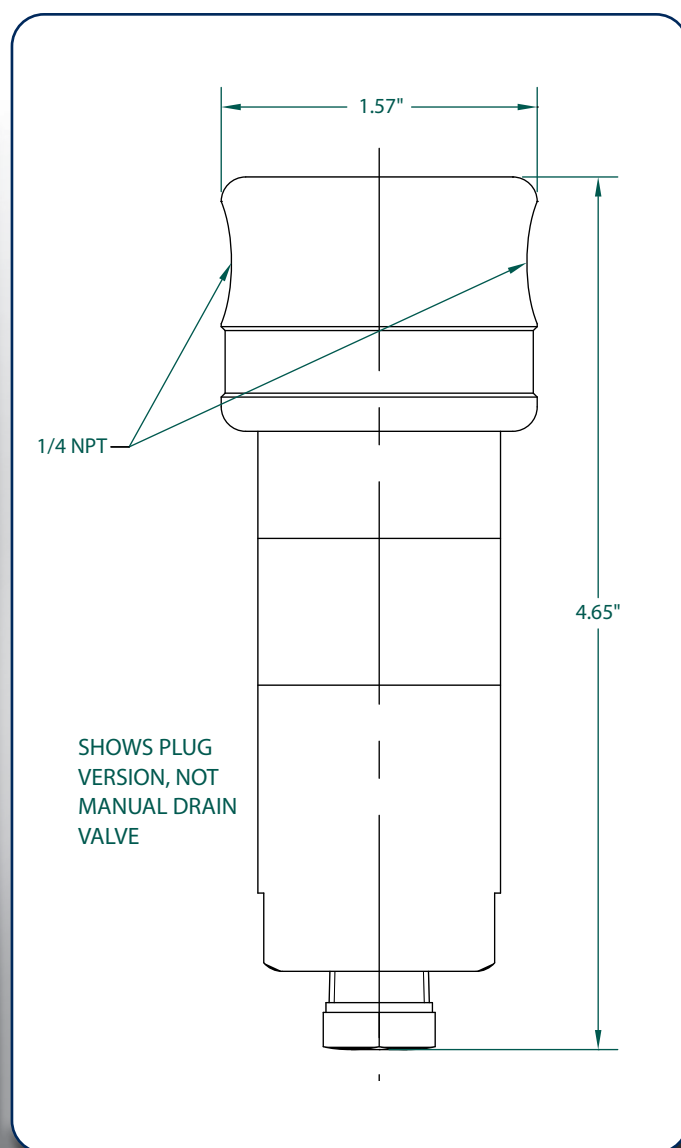

# BelGAS

A Division of the Marsh Bellofram Group of Companies

8019 Ohio River Blvd.  
Newell, WV 26050  
(304) 387-1200 | [www.belgas.net](http://www.belgas.net)



## BelGAS Website

With decades of proven market experience, the BelGAS division of Marsh Bellofram is a global leader in the design and manufacturing of high pressure regulators, low pressure regulators, and other flow control products. Scan the QR or visit our website at <https://bit.ly/BelGAS>



## BelGAS Regulator Sizing Wizard

Need help finding the right regulator for your application? Check out the BelGAS Regulator Sizing Wizard - an interactive online tool that makes it easier than ever to precisely match a regulator with your specifications. Scan the QR code or visit our website at <https://bit.ly/BelGAS-Wizard>



## BelGAS Videos

Interested in learning more about what BelGAS has to offer? Visit our YouTube channel and check out the BelGAS playlist for How-Tos, product overviews, and more! Scan the QR code or watch the videos on our YouTube channel at <https://bit.ly/BelGAS-YouTube-List>



The contents of this publication are presented for informational purposes only. Although we have made reasonable efforts to give information that we believe is up-to-date and accurate, we make no representations or warranties regarding its adequacy, accuracy, completeness, or correctness. We do not warrant or represent that the information is complete in every respect. Our terms and conditions, which are available upon request, govern all sales. We reserve the right to modify or improve the designs and specifications of our products, and the information contained in this document is subject to change without notice.

We reserve the right to modify or improve the designs or specifications of our products and the information contained in this document is subject to change without notice. The user is solely responsible for making the final selection of the product and assuring that all installation, performance, endurance, maintenance, safety, and warning requirements of the product are met. Final product recommendations should be verified by a gas professional.

BelGAS does not assume responsibility for its products' selection, use, or maintenance. Neither BelGAS nor its suppliers shall be liable for any loss or damage to the user or third parties caused by the product, the confidential information of BelGAS, or BelGAS's performance of these terms.