






SENSERT™ is a wireless, cloud-based sensor monitoring and alert system. A variety of sensors, such as temperature, humidity, vibration, and pressure, can be hardwired directly to the SENSERT Base Unit or wirelessly connected via the SENSERT Remote I/O. Sensor data is monitored in real-time and alerts are triggered based upon customizable thresholds.

Features:

- Sensor Monitoring
- Real-Time Alerts
- Android/iOS
- Cloud Based Data (Wireless)
- Hardwire and Remote Sensor Compatibility


SENSERT Base Unit

Power Supply	5-30 VDC	
Analog Inputs	4 - 0-20 mA, 4-20 mA, 0-5 V, 0-10 V	
Digital Inputs	2 - Dry Contact or NPN Type	
Digital Output	1 - Relay (240 VAC, 5A)	
Internal Measurements	Temperature and Humidity	
Analog Channel Impedance	mA: 200 ohm V: 1M ohm	
	Type	Dry Contact or NPN Type
	Logic Levels	Logical Level "0": From 0 to 0.5 VDC Logical Level "1": From 3 to 30 VDC
	Maximum Voltage	12 VDC
	Input Impedance	500k ohm
Digital Inputs	Input Current @ 12 VDC (Typical)	24uA
	Maximum Frequency (Square Wave)	Dry Contact: 500 Hz NPN: 500 Hz
	Minimum Pulse Duration	Dry Contact: 2 ms NPN: 2 ms
Resolution	4096 (12 bit ADC)	
Report Interval	Configurable	
Alerts	Configurable through the SENSERT Mobile App or Web Portal. Each channel can be configured for a high and low threshold value as well as custom alerts.	
Operation Temp	-4 to 131°F (-20 to 55°C)	
Accuracy	1% for all inputs, 2% for internal measurements	
Communication	RS485 [FUTURE DEVELOPMENT]	



SENSERT Applications

SENSERT is engineered to monitor sensors in critical processes and provide alerts to the user in numerous environments. SENSERT can be utilized in the following applications:

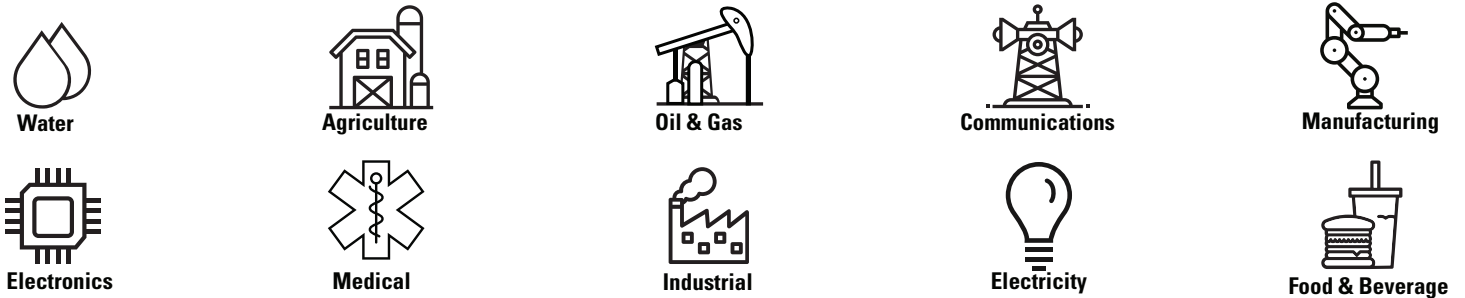

SENSERT Ecosystem



SENSERT Base Unit

- Power Supply: 5-30 VDC
- Analog Input: 4 [0-20 mA, 4-20 mA, 0-5 V, 0-10 V]
- Digital Input: 2 [Dry Contact]
- Digital Output: 1 [Relay]
- WiFi Cloud and Bluetooth-Mesh Device Communication




SENSERT Remote I/O

- Power Supply: 12-24 VDC or battery [2032]
- Analog Input: 1 [0-20 mA, 4-20 mA, 0-5 V, 0-10 V]
- Digital Input: 1 [Relay]
- Bluetooth-Mesh Device Communication



*Sensor

Any type of sensor with analog output of 0-20 mA, 4-20 mA, 0-5 V, 0-10 V

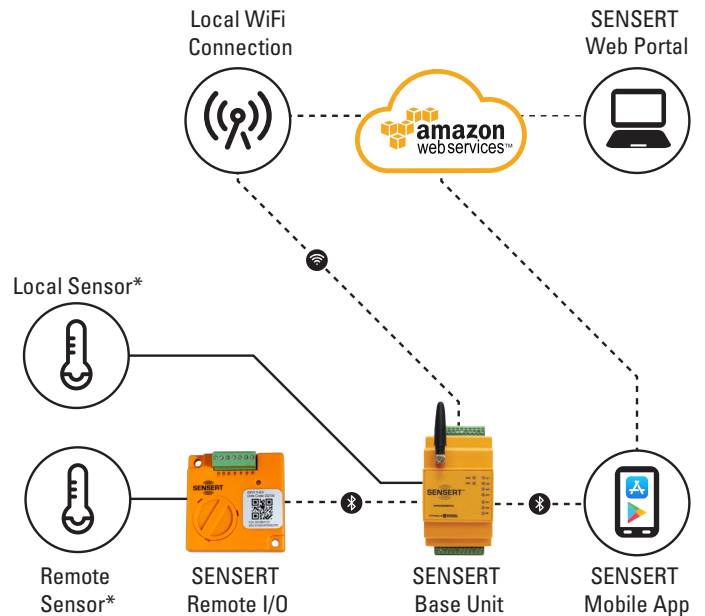

Ordering Information

Product	Product Number	Features
SENSERT Base Unit	SST-BWF1HH	<ul style="list-style-type: none"> • WiFi cloud communication • Combination wireless and hardwired device communication • Hardwired power • Hybrid DIN rail and panel mount
SENSERT Remote I/O	SST-RBM1CP	<ul style="list-style-type: none"> • Combination wireless and hardwired device communication • Combination battery and hardwired power • Panel mount