


REFINERY THERMOCOUPLE ASSEMBLY

Series 2100

- Complete Thermocouple Assembly with Cast Head
- Complete with 1/2" NPT SS Mounting Adapter
- PVC Coated Flex Armor Provides Moisture Resistance
- Design Fits Most Thermowells
- See page 23 for maximum temperature

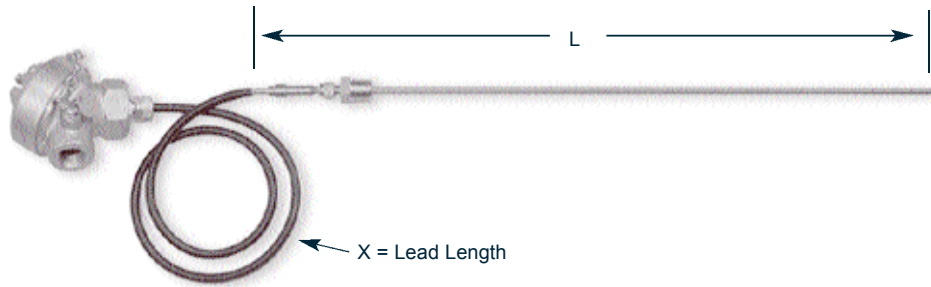

Enter a selection for each item, please fax your inquiry to TCP.

Example: 2100 - J - E - 6 - 36 - W2 - 316 - CI - 0

2100 - [] - [] - [] - [] - [] - [] - [] - []

CODE	WIRE CALIBRATION
J	Iron/Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan
For duplex calibrations please indicate double letters, example EE.	

CODE	SHEATH DIAMETER
E	.187"
F	.250"
L	.312"
.250 is standard	
Consult factory for other diameters	

IMMERSION LENGTH "L"
Whole inches 01 to 99 (6 inch increments standard). For lengths over 99 inches consult factory.

LEAD LENGTH "X"
36 inches standard, if other, specify

CODE	OTHER PERTINENT DATA
0	NONE
999	Special Request Consult Factory

CODE	CONNECTION HEAD
CI	Cast Iron
AL	Aluminum
Cast Iron is standard	

CODE	SHEATH MATERIAL
304	304 Stainless Steel
316	316 Stainless Steel
Consult factor for other options	

CODE	JUNCTION STYLE
W2	Grounded Rounded Tip
W4	Ungrounded Rounded Tip
Code W2 is standard	

Metric Orders Welcome

Place an **mm** in the appropriate selection box:

100 **mm**

Mineral Insulated