

Thermo-Couple Products Co.


www.tcproducts.com

a division of Marsh Bellofram
www.marshbellofram.com
1-800-727-5646

PENCIL THERMOCOUPLE

Series 5500

- Ideal for Applications Under 900°F (480°C)
- Small Diameter Thermocouple with Fiberglass Insulation
- Used Extensively for Food Applications
- Commonly Installed with Compression Fittings (Adapter)
- Used in a Variety of Industries

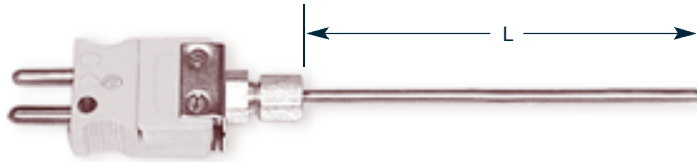

Enter a selection for each item, please fax your inquiry to TCP.

Example: 5500 - - - - - -

5500 - - - - - - -

CODE	WIRE CALIBRATION
J	Iron/Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan
Consult factory for other calibrations	

CODE	SHEATH DIAMETER
D	.125"
E	.187"
F	.250"
Consult factory for other diameters	

IMMERSION LENGTH "L"
Specify in inches 01 to 99 (6 inch increments standard). For lengths over 99 inches consult factory.

CODE	OTHER PERTINENT DATA
0	NONE
999	Special Request Consult Factory

CODE	TERMINATION STYLE
10	111 Standard Plug
20	131 Mini Plug
111 Plug is standard	
Consult factory for other options	

CODE	SHEATH MATERIAL
304	304 Stainless Steel
316	316 Stainless Steel
304SS is standard	
Consult factory for other material	

CODE	JUNCTION STYLE
W2	Grounded Rounded Tip
W4	Ungrounded Rounded Tip
Code W2 is standard	

Metric Orders Welcome

Place an **mm** in the appropriate selection box: