


CONTACT THERMOCOUPLE

Series 5513

- Recommended for Plastic Molding and Bearing Temperature Measurements up to 900°F (480°C).
- An Ideal Assembly Where Constant Contact of the Hot Junction is Required to Indicate Rapid Temperature Changes
- Spring Loaded Bayonet Cap

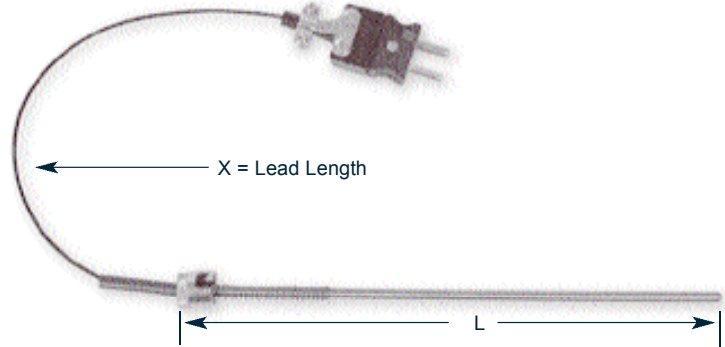

Enter a selection for each item, please fax your inquiry to TCP.

Example: 5513 - - - - - - - - -

5513 - - - - - - - - -

CODE	WIRE CALIBRATION
J	Iron/Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan
Consult factory for other calibrations	

CODE	SHEATH DIAMETER
D	.125"
E	.187"
Consult factory for other diameters	

IMMERSION LENGTH "L"
Specify in inches 01 to 99 (6 inch increments standard). For lengths over 99 inches consult factory.

LEAD LENGTH "X"
Specify in whole inches 01 to 99

CODE	JUNCTION STYLE
W1	Grounded Flat Tip
W2	Grounded Rounded Tip
Code W2 is standard	

CODE	OTHER PERTINENT DATA
0	NONE
999	Special Request Consult Factory

CODE	LEAD WIRE
10	Fiberglass (standard)
1S	Fiberglass with SS Overbraid
20	Teflon
2S	Teflon with SS Overbraid
Code 10 - 111 Plug is standard	

CODE	TERMINATION STYLE
10	111 Standard Plug
20	131 Mini Plug
40	3" Pig Tail
Code 10 - 111 Plug is standard	

CODE	SHEATH MATERIAL
304	304 Stainless Steel
316	316 Stainless Steel
600	Inconel 600
Consult factory for other material	

! Metric Orders Welcome

Place an **mm** in the appropriate selection box:

100 mm