


# WASHER THERMOCOUPLE

## Series 1400

- Designed for High Temperature Bolt or Stud Applications
- Stainless Steel Washer
- Welded Construction with Grounded Junction
- See page 23 for maximum temperature.

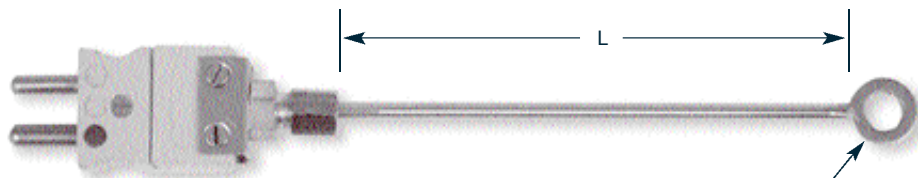

Washer: 3/4" OD x 3/8" ID

Enter a selection for each item, please fax your inquiry to TCP.

Example: 1400 - J - D - 6 - 304 - 10 - 0

1400 -  -  -  -  -  -

CODE	WIRE CALIBRATION
J	Iron/Constantan
K	Chromel/Alumel
T	Copper/ Constantan
E	Chromel/Constantan
R	Plat. 13% Rhod./Plat.
S	Plat. 10% Rhod./Plat.
B	Plat. 30% Rhod./Plat. 6% Rhod.

For duplex calibrations please indicate double letters, example EE.

CODE	SHEATH DIAMETER
D	.125"
E	.187"
F	.250"

Consult factory for other diameters

IMMERSION LENGTH "L"
Specify in inches 01 to 99 (6 inch increments standard). For lengths over 99 inches consult factory.

CODE	OTHER PERTINENT DATA
0	NONE
999	Special Request Consult Factory

CODE	TERMINATION STYLE
10	111 Standard Plug
20	131 Mini Plug
30	109 High Temp. Plugs

Code 10 - 111 Plug is standard  
Code 20 - 131 Plug available only on .125 diameter  
Consult factory for other options

CODE	SHEATH MATERIAL
304	304 Stainless Steel
316	316 Stainless Steel
600	Inconel 600

Consult factory for other material

Mineral Insulated

	<b>Metric Orders Welcome</b>
	Place an <b>mm</b> in the appropriate selection box: <input type="text" value="100 mm"/>